
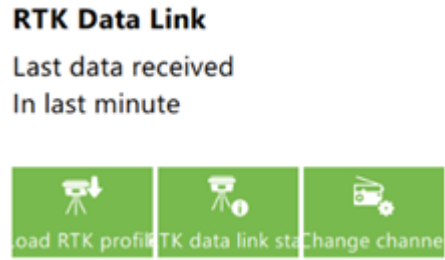
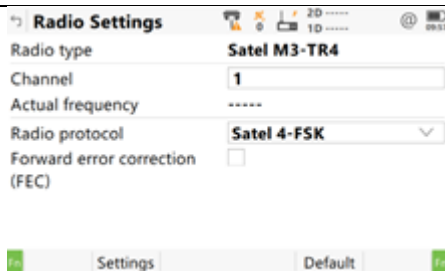
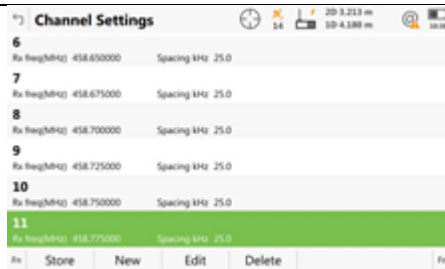
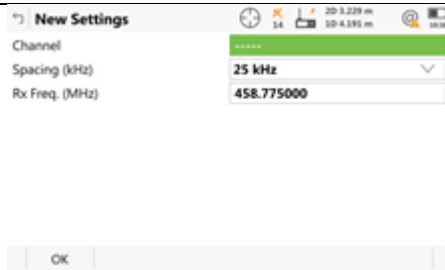


Leica Captivate: Adding radio channels – CS20 with GS16/GS18

1	When the internal radio is selected to receive RTK corrections. Tap on the radio symbol at the top of the controller screen.	
2	Select Change channel from the pop out menu	
3	Then hit the Fn key and tap Settings	
4	This should bring up the channel list within the internal radio.	
5	To add a new frequency hit New at the bottom of the screen. If you are requested to enter a password the password is: maintenance	

Sunbelt Rentals Survey

3 Orpheus House, Calleva Park, Aldermaston, Reading, RG7 8TA. 0330 678 0181 Support Number: 01293 565565

sales@sunbeltsurvey.co.uk www.sunbeltsurvey.co.uk

Registered Office: Sunbelt Rentals Ltd. 100 Cheapside, London EC2V 6DT. Registered No. 444569 England & Wales